


Occhio

Coro moon piano cover pro datasheet

LED recessed spotlight with fireball light source (swivable) for hollow ceilings or solid ceilings with ceiling box. model with cover ring for magnetical attachment. The spotlight is mounted with a simple tension spring mechanism and requires no screw fittings. Version with remote power supply unit, connection to external constant current power source (driver). Dimmable via customer-supplied dimmable power supply unit. The innovative LED fireball technology creates a special lighting effect - direct light in forward direction and atmospheric illumination by the fireballs indirect light. The fireball as a light source can be rotated by 360° (with stop), swiveled by 30° and has a light cone of 30°.

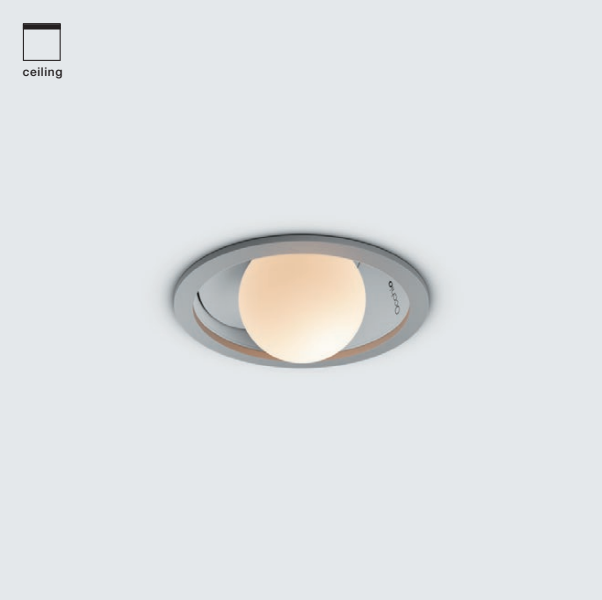

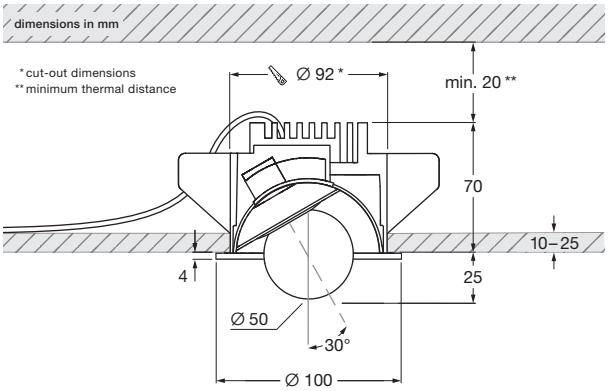



opt. third party »color tune« driver (2-channel driver with custom settings for Occhio fixtures)
L 174 × W 41 × H 29, cable length 50


technical data Coro moon piano cover pro


properties	material	aluminium, glass, PVD coated, painted, plastic
	turning range	360° (with stop)
	mobility head	30°
	weight	0.8 kg
surface	tube	matt white, matt black
	cover	gold, matt gold, rose gold polished, matt silver, phantom polished, black phantom polished, dark chrome polished
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2200–3500 K, 2700 K, 3000 K) or E (2700–4000 K, 4000 K)
	power	LED 9 W
	color rendering index	CRI Ra 92
	color temperature (color consistency)	single color: 2700 K, 3000 K, 4000 K (2-step) color tune: 2200–3500 K (2-step) 2700–4000 K (2-step)
electricity	dimming	with suitable power supply unit
	connection	single color (1-channel): max. 500 mA / 18 V DC color tune (2-channel): max. 1000 mA total current ($I_1 + I_2$) / 9 V DC per channel
	permitted operating conditions	ambient temperature 10 – 30°C, for indoor use only

IP 20

Occhio

Coro moon piano cover pro
lighting effects

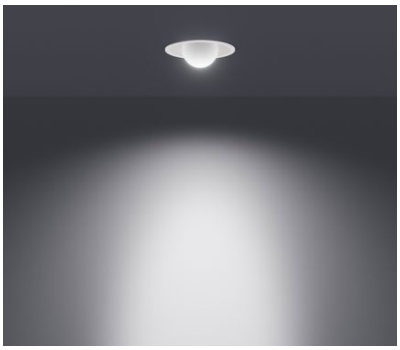



moon
direct, glare-free light,
beam angle approx. 30°

optics:	Occhio fireball	
power:	high color	9 W
luminous flux:	2700 K	670 lm
	3000 K	720 lm
	4000 K	820 lm
	2200–3500 K	510–660 lm
	2700–4000 K	580–710 lm