


Occhio

# Coro moon piano edge pro datasheet

LED recessed spotlight with fireball light source (swivable) for hollow ceilings or solid ceilings with ceiling box. edge model with filigree ceiling edge. The spotlight is mounted with a simple tension spring mechanism and requires no screw fittings. Version with remote power supply unit, connection to external constant current power source (driver). Dimmable via customer-supplied dimmable power supply unit. The innovative LED fireball technology creates a special lighting effect - direct light in forward direction and atmospheric illumination by the fireballs indirect light. The fireball as a light source can be rotated by 360° (with stop), swiveled by 30° and has a light cone of 30°.

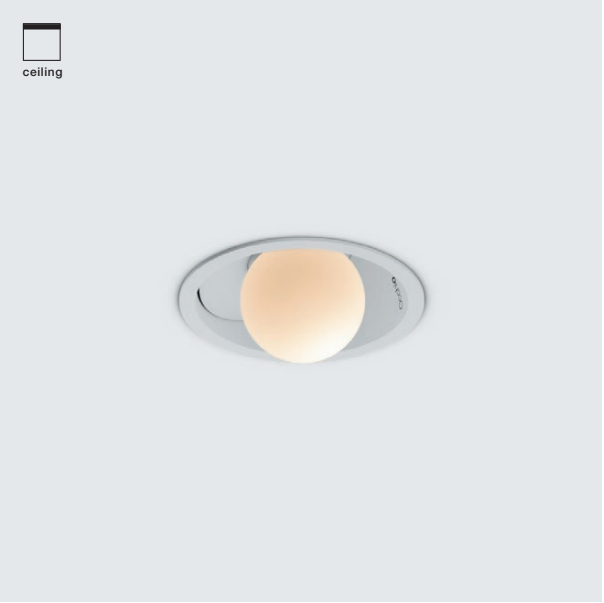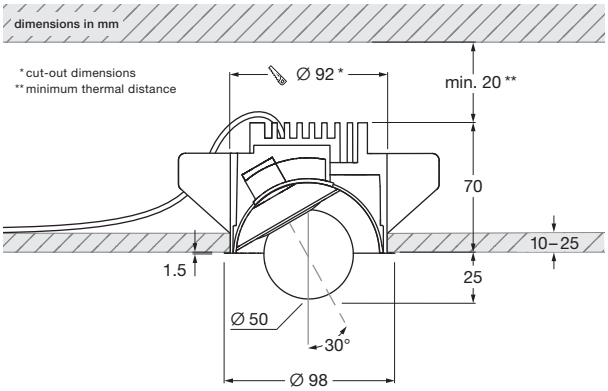


opt. third party »color tune« driver (2-channel driver with custom settings for Occhio fixtures)
L 174 × W 41 × H 29, cable length 50


**technical data Coro moon piano edge pro**


| | | |
|---|---|---|
| properties | material | aluminium, glass, painted, plastic |
| | turning range | 360° (with stop) |
| | mobility head | 30° |
| | weight | 0.8 kg |
| surface | tube | matt white, matt black |
| Occhio LED | average life time | > 50.000 hrs |
| | energy efficiency class | This product contains a light source of energy efficiency class F (2200–3500 K, 2700 K, 3000 K) or E (2700–4000 K, 4000 K) |
| | power | LED 9 W |
| | color rendering index | CRI Ra 92 |
| | color temperature (color consistency) | single color: 2700 K, 3000 K, 4000 K (2-step)<br>color tune: 2200–3500 K (2-step) 2700–4000 K (2-step) |
| electricity | dimming | with suitable power supply unit |
| | connection | single color (1-channel): max. 500 mA / 18 V DC<br>color tune (2-channel): max. 1000 mA total current ($I_1 + I_2$) / 9 V DC per channel |
| | permitted operating conditions | ambient temperature 10 – 30°C, for indoor use only |

IP 20

Occhio

# Coro moon piano edge pro
# lighting effects

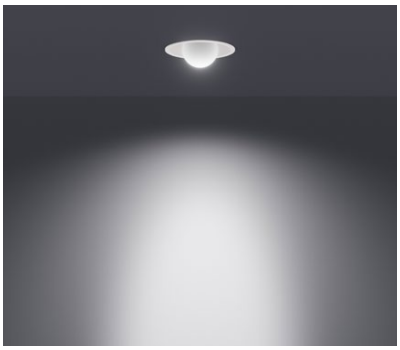




**moon**
direct, glare-free light,
beam angle approx. 30°

| | | |
|---|---|---|
| optics: | Occhio fireball | |
| power: | high color | 9 W |
| luminous flux: | 2700 K | 670 lm |
| | 3000 K | 720 lm |
| | 4000 K | 820 lm |
| | 2200–3500 K | 510–660 lm |
| | 2700–4000 K | 580–710 lm |