


Occhio

Coro moon zero v pro datasheet

LED recessed spotlight with fireball light source (downlight non-tiltable) for hollow ceilings with revision. zero model for flush mounting. The spotlight is mounted with a separate mounting sleeve. Version with remote power supply unit, connection to external constant current power source (driver). Dimmable via customer-supplied dimmable power supply unit. The innovative LED fireball technology creates a special lighting effect - direct, downward-facing light and atmospheric illumination by the fireballs indirect light. The fireball as a light source has a light cone of 30°.

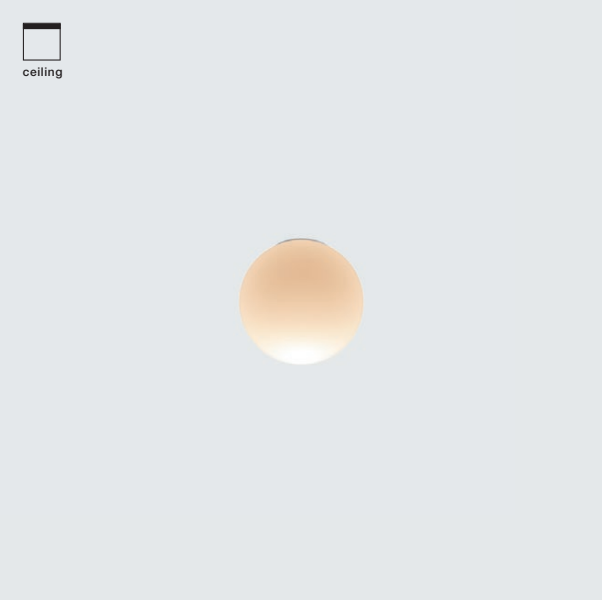

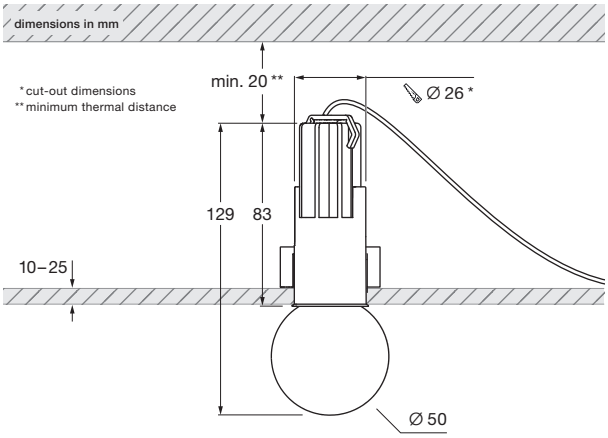



opt. third party »color tune« driver (2-channel driver with custom settings for Occhio fixtures)
L 174 × W 41 × H 29, cable length 50


technical data Coro moon zero v pro


properties	material	aluminium, glass, painted, plastic
	weight	0.3 kg
surface	holding ring	white, black
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2200–3500 K, 2700 K, 3000 K) or E (2700–4000 K, 4000 K)
	power	LED 7 W
	color rendering index	CRI Ra 92
	color temperature (color consistency)	single color: 2700 K, 3000 K, 4000 K (2-step) color tune: 2200–3500 K (2-step) 2700–4000 K (2-step)
electricity	dimming	with suitable power supply unit
	connection	single color (1-channel): max. 390 mA / 18 V DC color tune (2-channel): max. 780 mA total current ($I_1 + I_2$) / 9 V DC per channel
	permitted operating conditions	ambient temperature 10 – 30°C, for indoor use only

IP 20

Occhio

Coro moon zero v pro
lighting effects

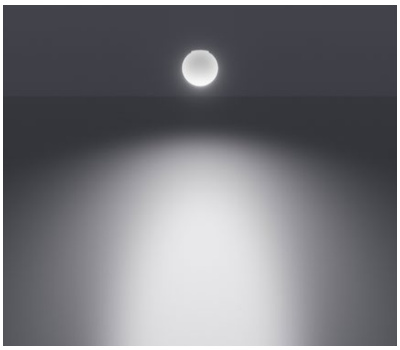



moon
direct, glare-free light,
beam angle approx. 30°

optics:	Occhio fireball	
power:	high color	7 W
luminous flux:	2700 K	560 lm
	3000 K	600 lm
	4000 K	680 lm
	2200–3500 K	420–550 lm
	2700–4000 K	480–590 lm