


Occhio

# Coro piano pro pure datasheet

LED recessed spotlight with zoom optics (swivable) for hollow ceilings or solid ceilings with ceiling box. pure model for frameless installation. The spotlight is mounted with a separate plastering ring. Version with remote power supply unit, connection to external constant current power source (driver). Dimmable via customer-supplied dimmable power supply unit. The zoom optics can be rotated by 360° (with stop), swiveled by 30° and the light cone can be continuously adjusted within 25–60°.

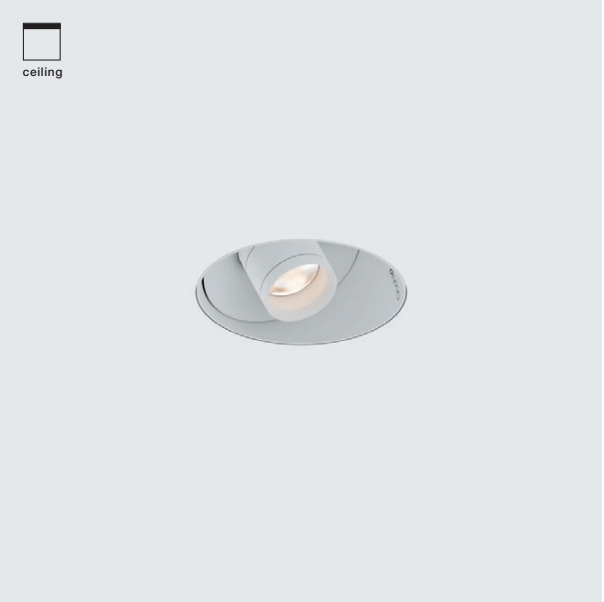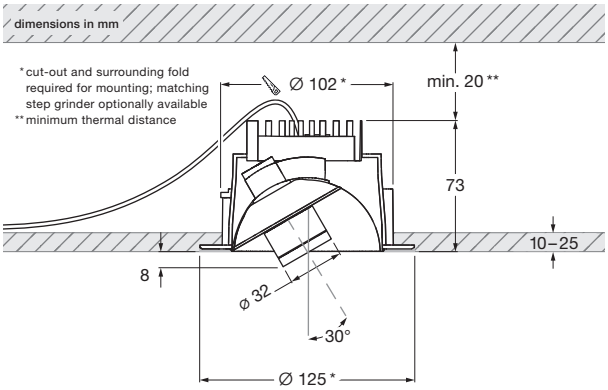


opt. third party »color tune« driver (2-channel driver with custom settings for Occhio fixtures)
L 174 × W 41 × H 29, cable length 50


**technical data Coro piano pro pure**


| | | |
|---|---|---|
| properties | material | aluminium, glass, PVD coated, painted, plastic |
| | turning range | 360° (with stop) |
| | mobility head | 30° |
| | weight | 0.5 kg |
| surface | zoom | bronze, matt gold, rose gold polished, matt silver, matt white, matt black, phantom polished, black phantom polished, dark chrome polished |
| | tube | matt white, matt black |
| Occhio LED | average life time | > 50.000 hrs |
| | energy efficiency class | This product contains a light source of energy efficiency class F (2200–3500 K, 2700 K, 3000 K) or E (2700–4000 K, 4000 K) |
| | power | LED 9 W |
| | color rendering index | CRI Ra 92 |
| | color temperature (color consistency) | single color: 2700 K, 3000 K, 4000 K (2-step)<br>color tune: 2200–3500 K (2-step) 2700–4000 K (2-step) |
| electricity | dimming | with suitable power supply unit |
| | connection | single color (1-channel): max. 500 mA / 18 V DC<br>color tune (2-channel): max. 1000 mA total current ($I_1 + I_2$) / 9 V DC per channel |
| | permitted operating conditions | ambient temperature 10 – 30°C, for indoor use only |

IP 20

Occhio


# Coro piano pro pure
# lighting effects

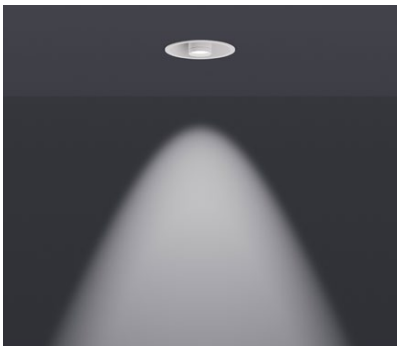





**Z25**
directed light (approx. 25°)

| | | |
|---|---|---|
| optics: | zoom lens | |
| power: | high color | 9 W |
| luminous flux: | 2700 K | 400 lm |
| | 3000 K | 420 lm |
| | 4000 K | 480 lm |
| | 2200–3500 K | 170–230 lm |
| | 2700–4000 K | 200–240 lm |

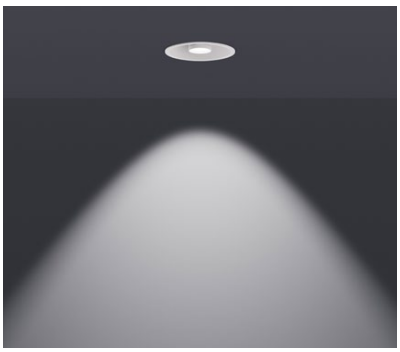

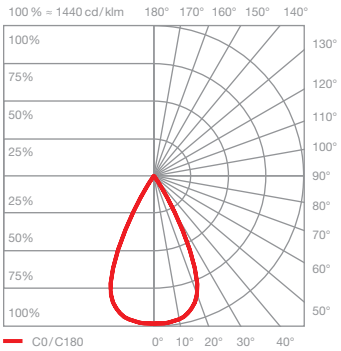


**Z60**
directed light (approx. 60°)

| | | |
|---|---|---|
| optics: | zoom lens | |
| power: | high color | 9 W |
| luminous flux: | 2700 K | 450 lm |
| | 3000 K | 480 lm |
| | 4000 K | 540 lm |
| | 2200–3500 K | 320–420 lm |
| | 2700–4000 K | 370–450 lm |