

Occhio


Coro piano v pure »air« datasheet

LED recessed downlight with fixed lens optic (non-tiltable). piano v downlight version for mounting on hollow ceilings. pure model for frameless installation. The downlight is mounted with a separate plaster ring.

Version with remote power supply unit, connection to 230 V AC mains voltage. Switching, dimming and »color tune« via Occhio air. The color temperature can be adjusted continuously between 2700–4000 K (optional 2200–3500 K). The fixed lens optic has a light cone of 60°.

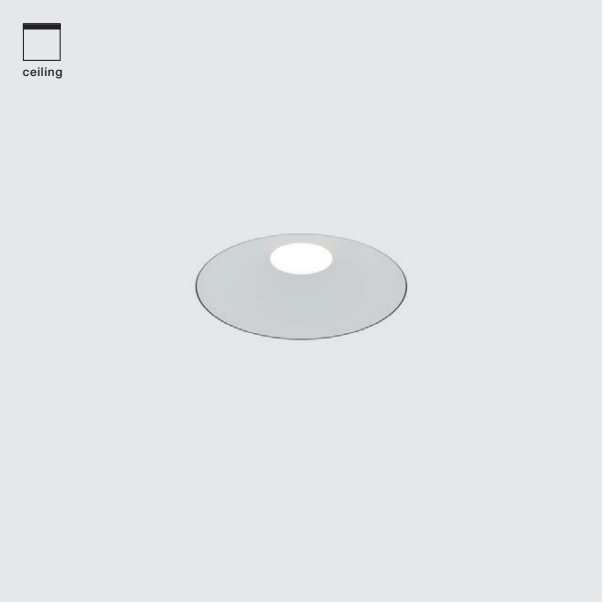

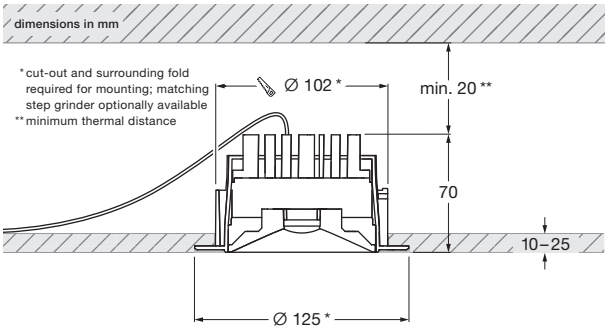



incl. flat driver »air« (removable)
L 95 × W 23.5 × H 20 (total cable length 250)

incl. power supply unit (removable)
L 165 × W 50 × H 23.6 (cable length 200)


technical data Coro piano v pure »air«


properties	material	aluminium, glass, painted, plastic
	weight	0.8 kg
surface	tube	matt white, matt black
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2200–3500K) or E (2700–4000K)
	power	LED 9 W (incl. Occhio power supply unit approx. 12 W, standby < 0.5 W)
	color rendering index	CRI Ra 92
	color temperature (color consistency)	color tune: 2200–3500 K (2-step) 2700–4000 K (2-step)
electricity	dimming	via Occhio air
	connection	230 V AC
	permitted operating conditions	ambient temperature 10 – 30°C, for indoor use only

IP 20

Occhio

Coro piano v pure »air«
lighting effects

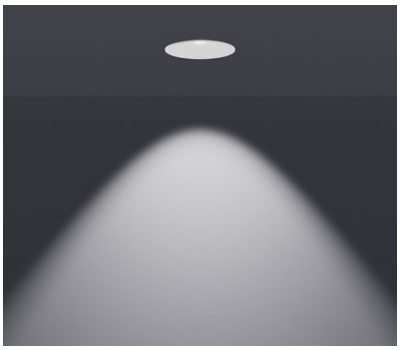



lens
direct light, beam angle approx. 60°

optics:	lens	
power:	high color	9 W
luminous flux:	2200–3500 K	310–410 lm
	2700–4000 K	360–430 lm