

Occhio


Coro piano v pure phase-cut datasheet

LED recessed downlight with fixed lens optic (non-tiltable). piano v downlight version for mounting on hollow ceilings. pure model for frameless installation. The downlight is mounted with a separate plaster ring. Version with remote power supply unit, connection to 230 V AC mains voltage. Dimmable via phase-cut dimmer. The color temperature can be configured to 2700 K, 3000 K or 4000 K when ordering.

The fixed lens optic has a light cone of 60°.

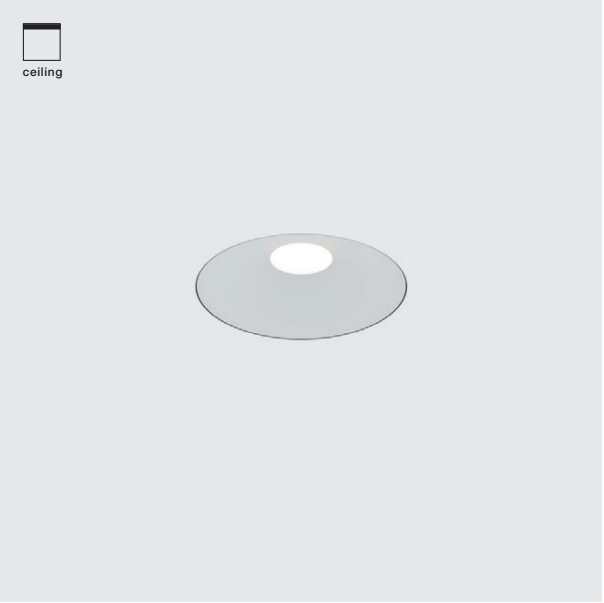

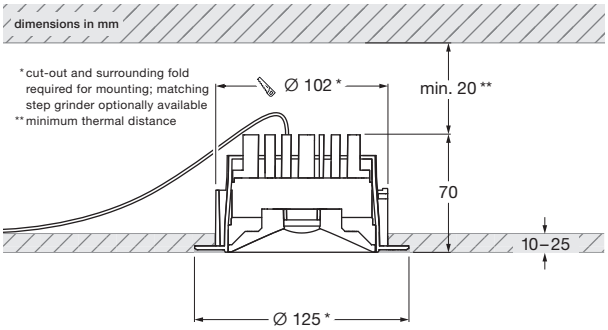



incl. power supply unit (removable)
L 165 × W 50 × H 23.6 (cable length 200)

technical data Coro piano v pure phase-cut


properties	material	aluminium, glass, painted, plastic
	weight	0.8 kg
surface	tube	matt white, matt black
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2700 K, 3000 K) or E (4000 K)
	power	LED 9 W (incl. Occhio power supply unit approx. 12 W, standby < 0.5 W)
	color rendering index	CRI Ra 92
	color temperature (color consistency)	2700K / 3000K / 4000 K (2-step)
electricity	dimming	via phase cut dimmer*
	connection	230 V AC
	permitted operating conditions	ambient temperature 10 – 30°C, for indoor use only


*** dimmer not included in the scope of delivery, for a list of compatible dimmers, see www.occhio.com/dim_en**

IP 20

Occhio

Coro piano v pure phase-cut lighting effects

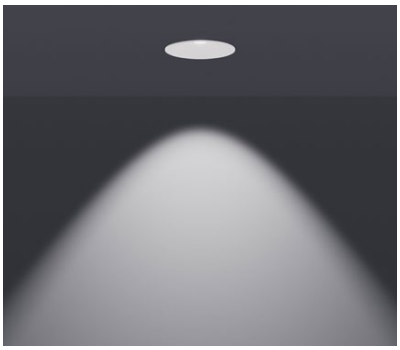



lens
direct light, beam angle approx. 60°

optics:	lens	
power:	high color	9 W
luminous flux:	2700 K	430 lm
	3000 K	460 lm
	4000 K	520 lm