

Occhio

Coro sospeso fix flat pro datasheet

LED suspended luminare with rod-shaped head and zoom optics. Version with flat base for installation on hollow ceilings or seiling sockets. Version with remote power supply unit, connection to external constant current power source (driver). Dimmable via customer-supplied dimmable power supply unit. The zoom optics are glare-free and continously adjustable within 40–80°.



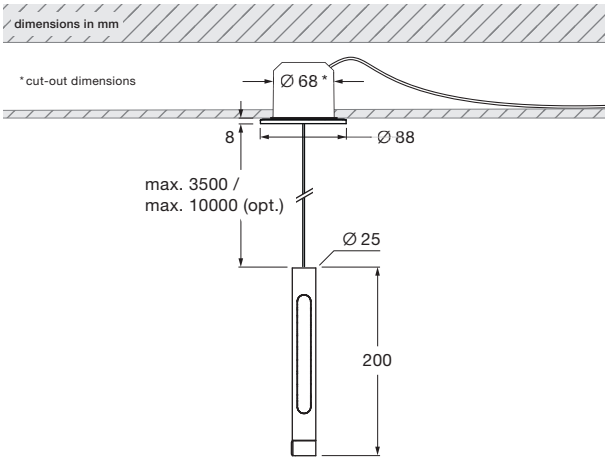



opt. third party »color tune« driver (2-channel driver with custom settings for Occhio fixtures)
L 174 × W 41 × H 29, cable length 50

technical data Coro sospeso fix flat pro


properties	material	aluminium, glass, PVD coated, painted, plastic
	height setting	max. 3500 mm (can be adjusted during fitting)
	weight	0.4 kg
surface	head / zoom	gold, matt gold, rose gold polished, matt silver, matt white, matt black, phantom polished, black phantom polished, dark chrome polished
	pads / cover	matt white, matt black
	cable	white, black
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2200–3500 K, 2700 K, 3000 K) or E (2700–4000 K, 4000 K)
	power	LED 6 W
	color rendering index	CRI Ra 92
	color temperature (color consistency)	single color: 2700 K, 3000 K, 4000 K (2-step) color tune: 2200–3500 K (2-step) 2700–4000 K (2-step)
electricity	dimming	with suitable power supply unit
	connection	single color (1-channel): max. 500 mA / 12 V DC color tune (2-channel): max. 1000 mA total current ($I_1 + I_2$) / 6 V DC per channel
	permitted operating conditions	ambient temperature 10 – 30°C, for indoor use only

IP 20

Occhio

Coro sospeso fix flat pro
lighting effects






Z40
directed light (approx. 40°)

optics:	zoom lens	
power:	high color	6 W
luminous flux:	2700 K	170 lm
	3000 K	180 lm
	4000 K	210 lm
	2200–3500 K	130–170 lm
	2700–4000 K	150–180 lm



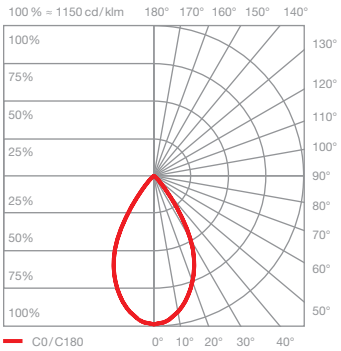

Z80
directed light (approx. 80°)

optics:	zoom lens	
power:	high color	6 W
luminous flux:	2700 K	270 lm
	3000 K	280 lm
	4000 K	320 lm
	2200–3500 K	200–260 lm
	2700–4000 K	230–280 lm