


Occhio

Coro zero v pro datasheet

LED recessed spotlight with fixed lens optics and 60° light cone (downlight non-tiltable) for hollow ceilings with revision. zero model for flush mounting. The spotlight is mounted with a separate mounting sleeve. Version with remote power supply unit, connection to external constant current power source (driver). Dimmable via customer-supplied dimmable power supply unit.

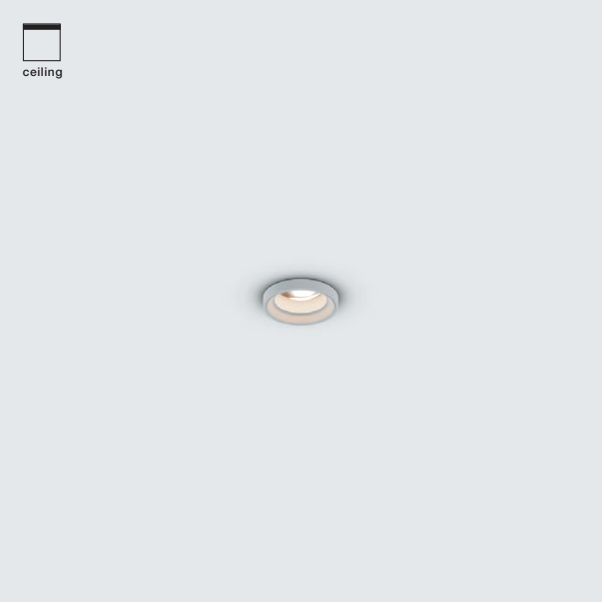

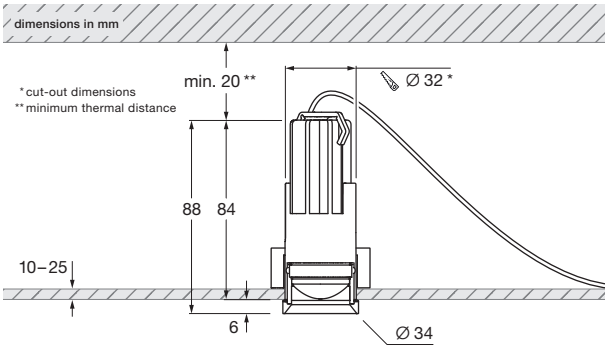



opt. third party »color tune« driver (2-channel driver with custom settings for Occhio fixtures)
L 174 × W 41 × H 29, cable length 50


technical data Coro zero v pro


properties	material	aluminium, glass, PVD coated, painted, plastic
	weight	0.1 kg
surface	head	gold, matt gold, rose gold polished, matt silver, matt white, matt black, phantom polished, black phantom polished, dark chrome polished
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2200–3500 K, 2700 K, 3000 K) or E (2700–4000 K, 4000 K)
	power	LED 7 W
	color rendering index	CRI Ra 92
	color temperature (color consistency)	single color: 2700 K, 3000 K, 4000 K (2-step) color tune: 2200–3500 K (2-step) 2700–4000 K (2-step)
electricity	dimming	with suitable power supply unit
	connection	single color (1-channel): max. 390 mA / 18 V DC color tune (2-channel): max. 780 mA total current ($I_1 + I_2$) / 9 V DC per channel
	permitted operating conditions	ambient temperature 10 – 30°C, for indoor use only

IP 20

Occhio

Coro zero v pro
lighting effects

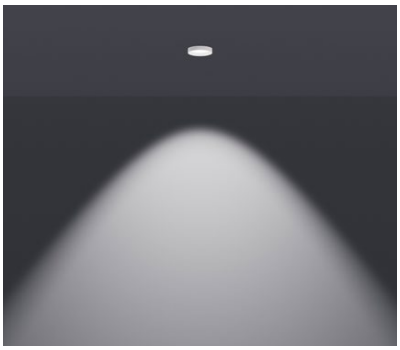



lens
direct light, beam angle approx. 60°

optics:	lens	
power:	high color	7 W
luminous flux:	2700 K	400 lm
	3000 K	420 lm
	4000 K	480 lm
	2200–3500 K	290–380 lm
	2700–4000 K	330–400 lm