
Occhio

Mito raggio lusso
datasheet

Annular LED arc luminaire with double-sided light emission and a diameter of 60 cm. Luminaire base provided with high quality marble (selectable), luminaire body covered with ascot leather (available in different finishes). Connection to 230 V AC / 50 Hz mains voltage via power supply unit (converter), removable head for maintenance purposes.

Luminous power 60 W, control via »touchless control« (gesture control on the head, can be deactivated), via body sensor on the luminaire body (can be deactivated) or with Occhio air



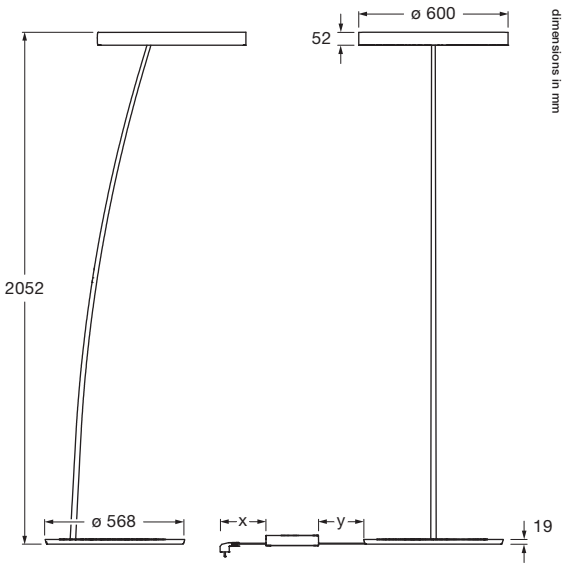


technical data Mito raggio lusso

properties	material	head aluminium, PVD-coated, anodised, optical silicone body / cover carbon painted, ascot leather base steel painted, marble	
	cable length	power supply unit (x): 1 m luminaire (y): 2 m of which 1.5 m are retractable	
	recommended ceiling height	min. 2.4 m	
	weight	28.0 kg	
surface	head	black phantom, phantom, rose gold	
	body / cover	nero, grigio, marrone	
	base	nero marquina, marrone emperador, verde guatemala	
	cable	matt black	
Occhio »color tune« LED	average life time	> 50.000 hrs	
	energy efficiency class	G (59 lm / W)	
	power	LED 60 W (incl. Occhio power supply approx. 66 W, standby < 0.5 W)	
	color rendering index	high color; CRI Ra 95	
	color temperature (color consistency)	2700–4000 K (3-step)	2200–3500 K (2-step 2200 K, 3-step 3500 K)
electricity	dimming	via »touchless control« on the head (can be deactivated), via body-sensor on the luminaire body (can be deactivated) or with Occhio air	
	connection	230 V AC / 50 Hz	
	power factor power supply (cos φ1)	0.9	
	flicker / stroboscopic effect	1 (PstLM) / 0.9 (SVM)	
	permitted operating conditions	max. 30°C for indoor use only	

IP 20

Occhio

Mito raggio lusso
lighting effects

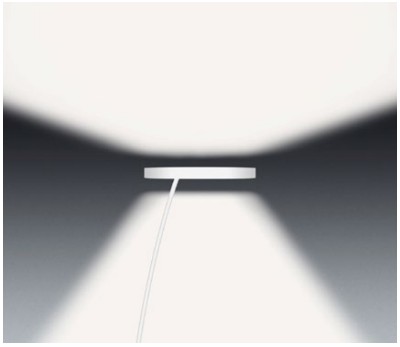




table (wide)
wide light beam (up and down), beam angle approx. 80° (down)

inserts: wide / flood

luminous flux : high color 60 W 3330 lm

UGR (4H8H) < 19