

Occhio

Mito alto side 70 flat pro datasheet

Linear LED ceiling luminaire with side light emission and a length of 70.5 cm. Thanks to the sidelight (wallwash), walls can be illuminated in a glare-free, homogeneous manner.

Version for hollow ceilings incl. power supply unit, cover and inlay (access panel to the power supply unit on the appropriate place required). The color temperature can be selected at the time of purchase (2700 K / 3000 K / 4000 K).

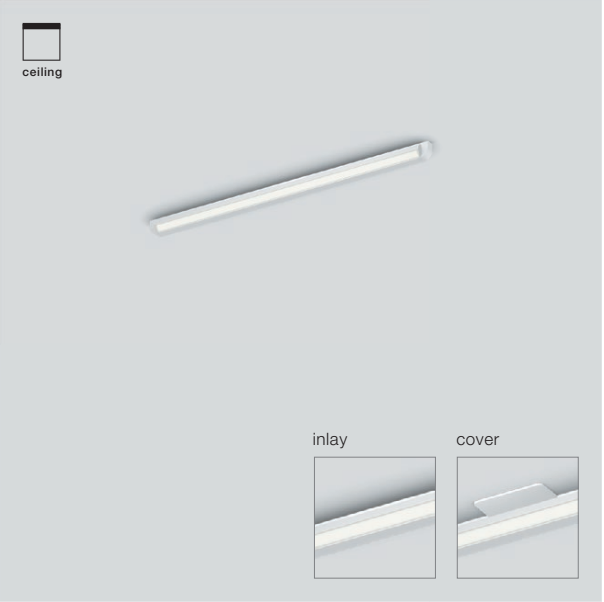

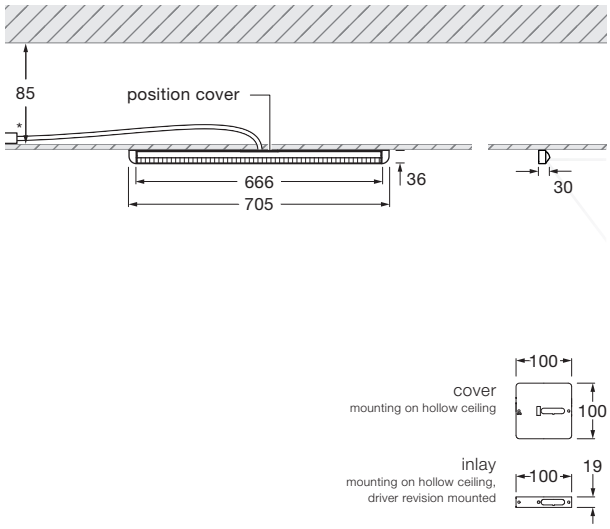

dimensions in mm


technical data Mito alto side 70 flat pro


properties	material	head aluminium, painted, PVD-coated steel, optical plastic cover painted plastic
	recommended wall clearance for homogeneous wall illumination	approx. 70 cm for 250 cm ceiling height approx. 85 cm for 300 cm ceiling height
	weight	1.2 kg
surface	head	bronze, matt gold, rose gold, matt silver, matt white, matt black, dark chrome, phantom, black phantom
	cover	matt white, matt silver, matt black
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class (luminous efficiency)	G (58 lm / W)
	power	LED 30 W
	color rendering index	high color; CRI Ra 95
	color temperature (color consistency)	2700 K, 3000 K, 4000 K (3-step)
electricity	dimming	with suitable power supply unit
	connection	max. 1050 mA const. / > 32 V DC
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only

IP 20

Occhio

Mito alto side 70 flat pro
lighting effects

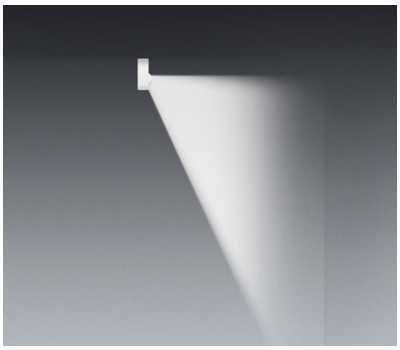



side
concentrated light, beam angle approx. 50°

inserts:	wallwash		
luminous flux:	high color	30 W	1600 lm