Occhio


Mito volo 140 fix pro datasheet

Linear LED pendant luminaire with double-sided light emission and a length of 136 cm. There are two lighting effects to choose from: table (wide) for use above tables — expansive light distributed downward and upward — and room (narrow) for luminaires that hang by themselves in a room — concentrated light aimed downward and diffuse light pointed upward. The maximum pendulum length is 350 cm (adjustable during installation).

The following mounting options are available:
– A version for hollow ceilings with a recessed cable drop (available with or without an access panel)
– Version for surface mounting (cable drop with cable redirection, cable drop with cord wrap)

The color temperature can be selected at the time of purchase (2700 K / 3000 K / 4000 K).



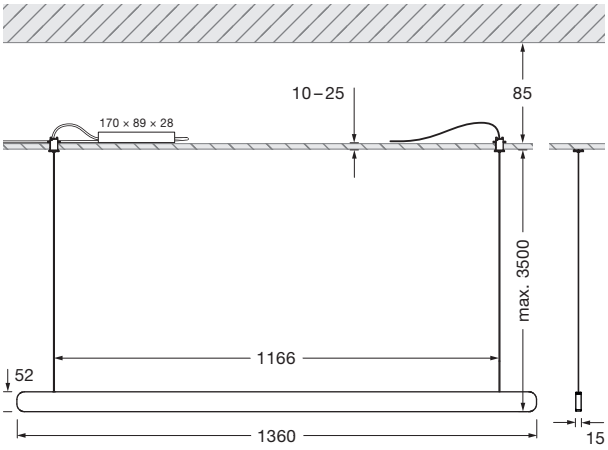

dimensions in mm

technical data Mito volo 140 fix pro


properties	material	head aluminium, painted, PVD-coated steel, optical plastic cover / cable redirection / driver box / cord wrap painted plastic
	height setting	max. 3500 mm (can be adjusted during fitting)
	weight	2.6 kg
surface	head	bronze, matt gold, rose gold, matt silver, matt white, matt black, dark chrome, phantom, black phantom
	cover / cable redirection / driver box / cord wrap	matt white, matt black
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class (luminous efficiency)	G (71 lm / W)
	power	LED 60 W
	color rendering index	high color; CRI Ra 95
	color temperature (color consistency)	2700 K, 3000 K, 4000 K (3-step)
electricity	dimming	with suitable power supply unit
	connection	max. 2100 mA const. / > 32 V DC (up + down together controllable) max. 2 × 1050 mA const. / > 32 V DC (up + down separately controllable)
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only

IP 20

Mito volo 140 fix pro mounting versions


Version for hollow ceiling with cover

Wire suspension for hollow ceiling with cover
power supply unit – mounting in suspended ceiling above luminaire




Version for hollow ceiling without cover

Wire suspension for hollow ceiling without cover
power supply unit – mounting via separate inspection opening




Version for solid ceiling

Wire suspension for solid ceiling
power supply unit – mounting via cable deflection



Occhio

Mito volo 140 fix pro
lighting effects

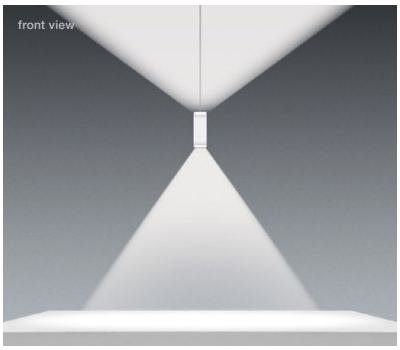






table (wide)
wide light beam (up and down), beam angle approx. 80° (down)


inserts: wide / flood


luminous flux: high color 60 W 3900 lm

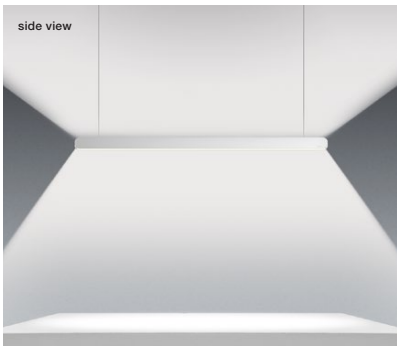



UGR (4H8H) < 19 *

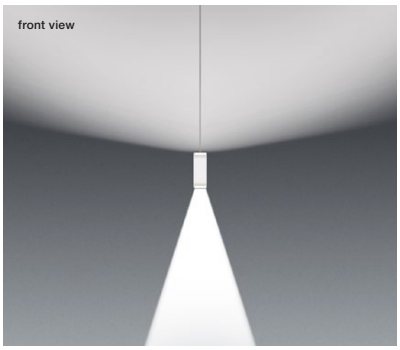





room (narrow)
concentrated light downwards, beam angle approx. 25°, diffuse upwards

inserts: narrow / diffuse

luminous flux: high color 60 W 3700 lm

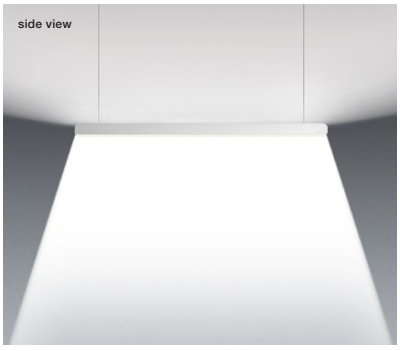



UGR (4H8H) < 19 *

*** For a reliable assessment of glare values in a real application of a luminaire we recommend to carry out an individual calculation which can be prepared by our lighting team (lightingdesign@occhio.de).**