Occhio

Occhio PRO gateway datasheet


The Occhio PRO gateway, besides a KNX integration, also enables remote access, diagnostics, automated processes, and system-wide scene control – without a smartphone nearby.

Additionally, the gateway offers a fully certified KNX integration: All Occhio luminaires, groups, rooms and lighting scenes along with their individual functions (on / off, dimming, color tune, up / down fading, magic move, focus light), can be seamlessly and bidirectionally integrated into KNX systems. Integration into KNX systems requires an Evolution network.

This makes the Occhio PRO gateway the central bridge between Occhio lighting worlds and professional home automation.



dimensions in mm

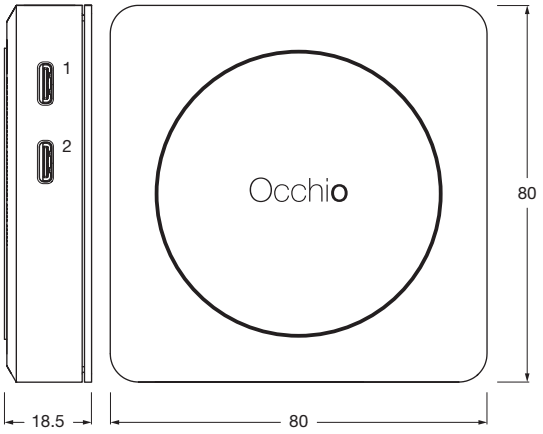

1 power supply
2 USB-C for ethernet connector

technical data Occhio PRO gateway

properties	material	zinc, plastic, steel
	scope of delivery	mains adapter, charging cable (USB-C: 1.8 m)
	accessory (optional)	KNX kit (Occhio KNX module, USB to Ethernet adapter), wall mount kit (L 80 mm × B 80 mm × H 6 mm)
	weight	0.3 kg
surface	housing	black
	lid	black
Occhio air	network compatibility	evolution (classic is not supported)
electricity	transmission technology	bluetooth low energy, Wi-Fi (2.4 GHz and 5.0 GHz), USB-C
	power supply	USB-C 2.5 W / DC 5 V min. 1.5 A
	max. power	3.8 W (power up) / 4 W (power up incl. ethernet connector)
	operating capacity	0.9 W (continuous operation) / 1.3 W (continuous operation incl. ethernet connector)
	permitted operating conditions	ambient temperature 10 – 30°C, for indoor use only

IP 20