
Occhio

Più alto 3d pro datasheet

LED wall / ceiling spotlight with single-sided light output. Optionally available with lens optics (Più) or flat cone glass with internal lens (Più R).

Version with flat base for fitting on hollow ceiling or flush-mounted box with remote power supply unit, connection to external power source (driver). Dimmable via customer-supplied dimmable power supply unit. Movable in any direction thanks to Occhio 3D kinematics with two pivots set at an angle of 45° to each other. Using a simple mechanism, the lighting effect can be changed at any time through the use of optional inserts, dichroitic colour filter can be additionally inserted, Occhio light module with replaceable LED.



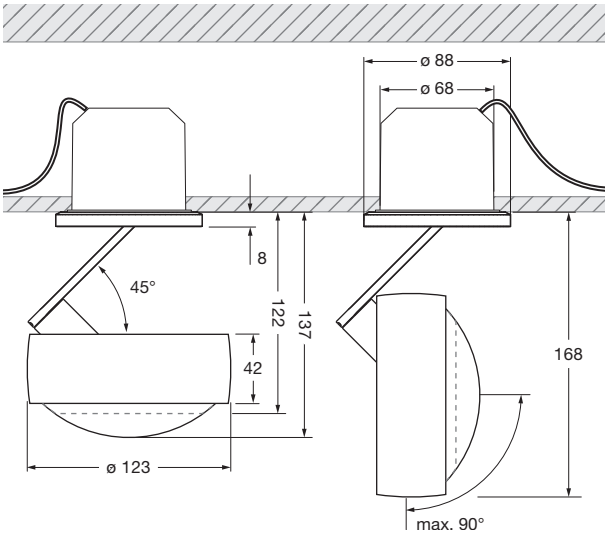

—— Più with lens
----- Più R with cone glass







dimensions in mm









technical data Più alto 3d pro

properties	mmaterial	aluminium, brass, steel – chrome-plated or painted, optical plastic, glass	
	turning range body	360° (with stop)	
	turning range head	360° (with stop)	
	weight	1 kg	
surface	head	matt gold, rose gold, bronze, shiny chrome, dark chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom	
	body	shiny chrome, dark chrome, matt chrome, matt white, matt black	
	base	shiny chrome, dark chrome, matt chrome, glossy white, matt white, matt black	
	lens	matt white, matt black (lens edge)	
	cone glass	rose gold, bronze, shiny chrome, dark chrome, matt chrome, matt white, matt black, phantom, black phantom	
Occhio light module	average life time	> 50.000 hrs	
	energy efficiency class (luminous efficiency)	G (69 lm / W)	
	power	LED 26 W	
	color rendering index	perfect color; CRI Ra 97	high flux; CRI Ra 85
	color temperature	2700 K, 3000 K	3000 K, 3500 K, 4000 K
electricity	dimming	by trailing-edge phase-cut dimmer, button or DALI (depending on power supply unit)	
	power supply unit	remote, operation via constant-current source, max. 700 mA / > 36 V DC	
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only	

IP 20


Più alto 3d pro
overview optics

Più	C 80	S 100	S 80	S 60	S 40	S 30
						
small lens low						
small lens medium						
satinised glass						
soft edge glass						
fresnel lens						
color filter (optional)						
lens						

Più R	B	C 100	C 80	S 100	S 80	S 60	S 40	S 30
								
small lens low								
small lens medium								
small lens high								
satinised glass								
soft edge glass								
fresnel lens								
color filter (optional)								
cone glass								
	diffus	100°, contour	80°, contour	100°, soft	80°, soft	60°, soft	40°, soft	30°, soft

Più alto 3d pro
Più lighting effects






C 80 contour
scattered light with contour beam angle (approx. 80°)

inserts:	lens		
luminous flux:	perfect color	26 W	1640 lm
	high flux	26 W	2240 lm






S 100 soft
scattered light with soft contour beam angle (approx. 100°)

inserts:	lens satinised glass		
luminous flux:	perfect color	26 W	1260 lm
	high flux	26 W	1720 lm






S 80 soft
scattered light with soft contour beam angle (approx. 80°)

inserts:	lens soft edge glass		
luminous flux:	perfect color	26 W	1420 lm
	high flux	26 W	1930 lm







S 60 soft
scattered light with soft contour beam angle (approx. 60°)

inserts:	lens small lens low soft edge glass		
luminous flux:	perfect color	26 W	1610 lm
	high flux	26 W	2200 lm

Più alto 3d pro
Più lighting effects

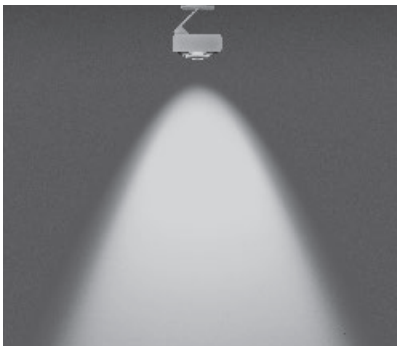




S 40 soft
scattered light with soft contour beam angle (approx. 40°)

inserts:	lens small lens medium soft edge glass		
luminous flux:	perfect color	26 W	1680 lm
	high flux	26 W	2300 lm







S 30 soft
scattered light with soft contour beam angle (approx. 30°)

inserts:	lens small lens medium fresnel lens		
luminous flux:	perfect color	26 W	1650 lm
	high flux	26 W	2250 lm

Più alto 3d pro
Più R lighting effects

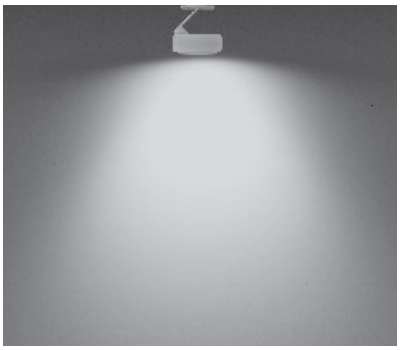




B diffus
diffused light

inserts: cone glass
small lens low
satinised glass

luminous flux: perfect color 26 W 1370 lm
high flux 26 W 1870 lm







C 100 contour
scattered light with contour beam angle (approx. 100°)

inserts: cone glass
small lens low

luminous flux: perfect color 26 W 1680 lm
high flux 26 W 2290 lm

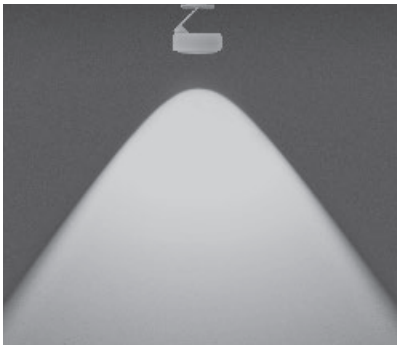




C 80 contour
scattered light with contour beam angle (approx. 80°)

inserts: cone glass
small lens medium

luminous flux: perfect color 26 W 1810 lm
high flux 26 W 2460 lm






S100 soft
scattered light with soft contour beam angle (approx. 100°)

inserts: cone glass
small lens low
soft edge glass

luminous flux: perfect color 26 W 1520 lm
high flux 26 W 2070 lm

Più alto 3d pro
Più R lighting effects






S 80 soft
scattered light with soft contour beam angle (approx. 80°)


inserts:	cone glass small lens medium soft edge glass		
luminous flux:	perfect color high flux	26 W 26 W	1690 lm 2310 lm






S 60 soft
scattered light with soft contour beam angle (approx. 60°)


inserts:	cone glass small lens high soft edge glass		
luminous flux:	perfect color high flux	26 W 26 W	1610 lm 2200 lm

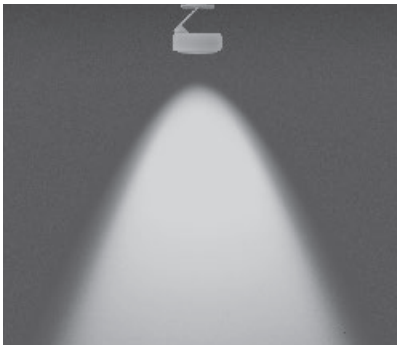




S 40 soft
scattered light with soft contour beam angle (approx. 40°)

inserts:	cone glass small lens medium fresnel lens		
luminous flux:	perfect color high flux	26 W 26 W	1600 lm 2190 lm

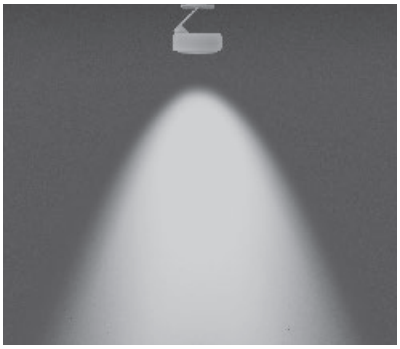



S 30 soft
scattered light with soft contour beam angle (approx. 30°)

inserts:	cone glass small lens high fresnel lens		
luminous flux:	perfect color high flux	26 W 26 W	1560 lm 2130 lm