Occhio


Più alto v pro datasheet


LED ceiling spotlight with single-sided light output for use as a downlight. Choice of lens design (Più) or flat cone glass with interior lens (Più R).

Version for mounting on cavity or ceiling box with external power supply unit, connection to power source (driver). Can be dimmed at the installation location through dimmable power supply unit.

Using optional inserts and activating a simple mechanism allows the lighting effect to be changed at any time. Dichroic color filters can also be used, and the Occhio light engine can be exchanged.



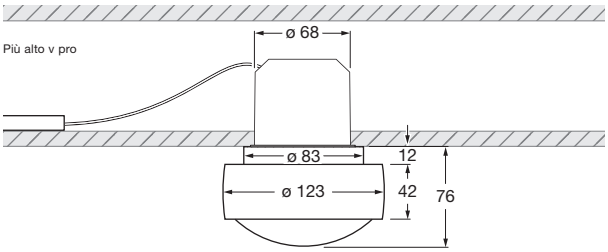






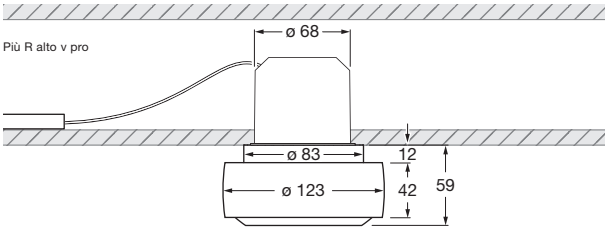










dimensions in mm

technical data Più alto v pro

properties	material	aluminium, brass, steel – chrome-plated or painted, plastic, optical plastic, glass
	weight	0.85 kg
surface	head	matt gold, rose gold, bronze, shiny chrome, dark chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom
	base	shiny chrome, dark chrome, matt chrome, matt white, matt black
	lens	matt white, matt black (lens edge)
	cone glass	rose gold, bronze, shiny chrome, dark chrome, matt chrome matt white, matt black, phantom, black phantom
Occhio light module	average life time	> 50.000 hrs
	energy efficiency class (luminous efficiency)	G (69 lm / W)
	power	LED 26 W
	color rendering index	perfect color; CRI Ra 97
	color temperature	2700 K, 3000 K
electricity	dimming	with suitable power supply unit
	power supply unit	remote, operation via constant-current source, max. 700 mA / > 36 V DC
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only


Più alto v pro overview optics

Più	C 80	S 100	S 80	S 60	S 40	S 30
						
small lens low						
small lens medium						
satinised glass						
soft edge glass						
fresnel lens						
color filter (optional)						
lens						

Più R	B	C 100	C 80	S 100	S 80	S 60	S 40	S 30
								
small lens low								
small lens medium								
small lens high								
satinised glass								
soft edge glass								
fresnel lens								
color filter (optional)								
cone glass								
	diffus	100°, contour	80°, contour	100°, soft	80°, soft	60°, soft	40°, soft	30°, soft

Più alto v pro
Più lighting effects






C 80 contour
scattered light with contour beam angle (approx. 80°)

inserts:	lens		
luminous flux:	perfect color	26 W	1640 lm
	high flux	26 W	2240 lm






S 100 soft
scattered light with soft contour beam angle (approx. 100°)

inserts:	lens satinised glass		
luminous flux:	perfect color	26 W	1260 lm
	high flux	26 W	1720 lm






S 80 soft
scattered light with soft contour beam angle (approx. 80°)

inserts:	lens soft edge glass		
luminous flux:	perfect color	26 W	1420 lm
	high flux	26 W	1930 lm







S 60 soft
scattered light with soft contour beam angle (approx. 60°)

inserts:	lens small lens low soft edge glass		
luminous flux:	perfect color	26 W	1610 lm
	high flux	26 W	2200 lm

Più alto v pro
Più lighting effects

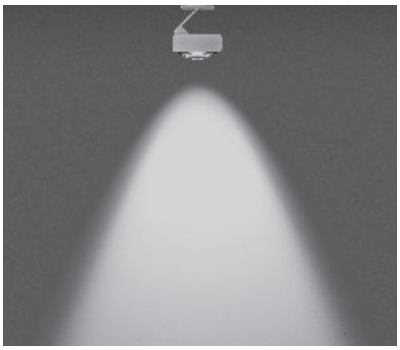




S 40 soft
scattered light with soft contour beam angle (approx. 40°)

inserts:	lens small lens medium soft edge glass		
luminous flux:	perfect color	26 W	1680 lm
	high flux	26 W	2300 lm







S 30 soft
scattered light with soft contour beam angle (approx. 30°)

inserts:	lens small lens medium fresnel lens		
luminous flux:	perfect color	26 W	1650 lm
	high flux	26 W	2250 lm

Più alto v pro
Più R lighting effects

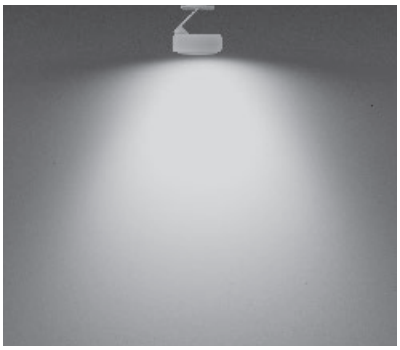




B diffus
diffused light

inserts: cone glass
small lens low
satinised glass

luminous flux: perfect color 26 W 1370 lm
high flux 26 W 1870 lm







C 100 contour
scattered light with contour beam angle (approx. 100°)

inserts: cone glass
small lens low

luminous flux: perfect color 26 W 1680 lm
high flux 26 W 2290 lm

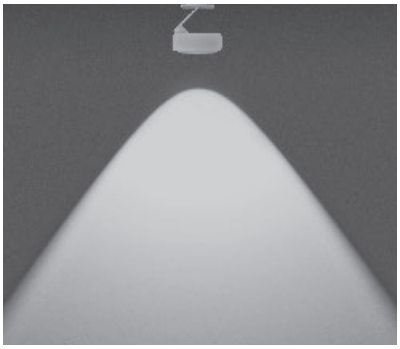




C 80 contour
scattered light with contour beam angle (approx. 80°)

inserts: cone glass
small lens medium

luminous flux: perfect color 26 W 1810 lm
high flux 26 W 2460 lm






S 100 soft
scattered light with soft contour beam angle (approx. 100°)

inserts: cone glass
small lens low
soft edge glass

luminous flux: perfect color 26 W 1520 lm
high flux 26 W 2070 lm

Più alto v pro
Più R lighting effects






S 80 soft
scattered light with soft contour beam angle (approx. 80°)

inserts: cone glass
small lens medium
soft edge glass

luminous flux:			
	perfect color	26 W	1690 lm
	high flux	26 W	2310 lm







S 60 soft
scattered light with soft contour beam angle (approx. 60°)

inserts: cone glass
small lens high
soft edge glass

luminous flux:			
	perfect color	26 W	1610 lm
	high flux	26 W	2200 lm

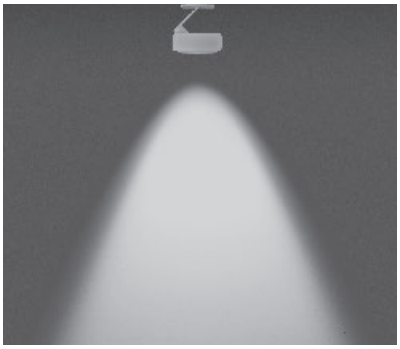





S 40 soft
scattered light with soft contour beam angle (approx. 40°)

inserts: cone glass
small lens medium
fresnel lens

luminous flux:			
	perfect color	26 W	1600 lm
	high flux	26 W	2190 lm

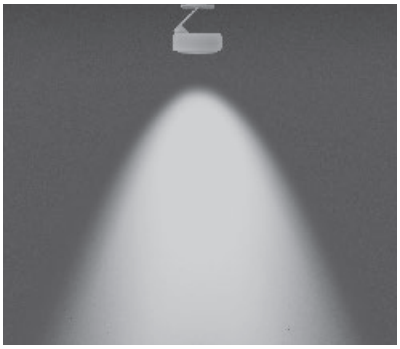



S 30 soft
scattered light with soft contour beam angle (approx. 30°)

inserts: cone glass
small lens high
fresnel lens

luminous flux:			
	perfect color	26 W	1560 lm
	high flux	26 W	2130 lm