
Occhio

# Più piano edge pro datasheet

LED recessed spotlight with filigree ceiling edge for hollow ceilings or solid ceilings with ceiling box. The spotlight is mounted with a simple tension wing mechanism that requires no screw fittings. Can be mounted flush with the ceiling (Più piano edge) or recessed (Più piano in edge).

Choice of lens design (Più) or flat cone glass with interior lens (Più R). Version with external power supply unit, connection to power source (driver). Can be dimmed at the installation location with a dimmable power supply unit. Head can be freely positioned in all directions with the unique ball joint principle (Più piano 30°, Più piano in 20°). Optional inserts allow the lighting effect to be changed at any time with a simple mechanism; dichroic color filters can also be used, Occhio light modules can be exchanged.

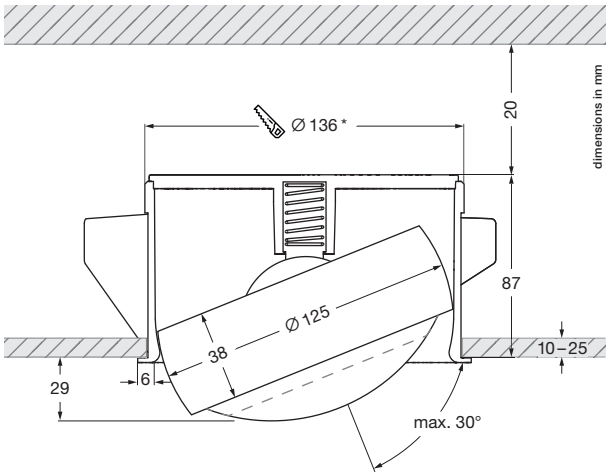


* cut-out dimensions
Installation depth: 107 mm

----- Più R with cone glass
—— Più with lens

** minimum thermal distance, installation height depending on driver

**technical data Più piano edge pro**

| | | | |
|---|---|---|---|
| properties | material | aluminium, brass, steel – chrome-plated or painted, optical plastic, glass | |
| | turning range head | 360° | |
| | mobility head | 30° (with stop) | |
| | weight | 1.2 kg | |
| surface | head | matt gold, rose gold, bronze, shiny chrome, dark chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom | |
| | tube | matt white, matt black | |
| | lens | matt white, matt black (lens edge) | |
| | cone glass | rose gold, bronze, shiny chrome, dark chrome, matt chrome, matt white, matt black, phantom, black phantom | |
| Occhio light module | average life time | > 50.000 hrs | |
| | energy efficiency class (luminous efficiency) | G (69 lm / W) | |
| | power | LED 26 W | |
| | color rendering index | perfect color; CRI Ra 97 | high flux; CRI Ra 85 |
| | color temperature | 2700 K, 3000 K, 4000 K | 3000 K, 3500 K, 4000 K |
| electricity | dimming | with suitable power supply unit | |
| | power supply unit | max. 700 mA const. / > 36 V DC | |
| | permitted operating conditions | ambient temperature 10–30°C, for indoor use only | |

* concrete ceiling (Kaiser HaloX 250 with mineral-fibre board) driver max. L 210 mm × W 30 mm

IP 20


# Più piano edge pro

30° swivel angle
360° rotatability


**Più piano edge pro**
head H 38 mm, ø 125 mm



**edge mounting tube**




hollow ceiling









concrete ceiling
(Kaiser HaloX 250 with mineral-fibre board)
driver max. L 210 mm × W 30 mm












ceiling edge

* cut-out dimensions


# Più piano edge pro overview optics

| Più | C 80 | S 100 | S 80 | S 60 | S 40 | S 30 |
|---|---|---|---|---|---|---|
| |  |  |  |  |  |  |
| small lens low | | | |  | | |
| small lens medium | | | | |  |  |
| satinised glass | |  | | | | |
| soft edge glass | | |  |  |  | |
| fresnel lens | | | | | |  |
| color filter (optional) |  |  |  |  |  |  |
| lens |  |  |  |  |  |  |

| Più R | B | C 100 | C 80 | S 100 | S 80 | S 60 | S 40 | S 30 |
|---|---|---|---|---|---|---|---|---|
| |  |  |  |  |  |  |  |  |
| small lens low |  |  | |  | | | | |
| small lens medium | | |  | |  | |  | |
| small lens high | | | | | |  | |  |
| satinised glass |  | | | | | | | |
| soft edge glass | | | |  |  |  | | |
| fresnel lens | | | | | | |  |  |
| color filter (optional) |  |  |  |  |  |  |  |  |
| cone glass |  |  |  |  |  |  |  |  |
| |  |  |  |  |  |  |  |  |
| | diffus | 100°, contour | 80°, contour | 100°, soft | 80°, soft | 60°, soft | 40°, soft | 30°, soft |

# Più piano edge pro
# Più lighting effects







**C 80 contour**
scattered light with contour beam angle (approx. 80°)

| | | | |
|---|---|---|---|
| inserts: | lens | | |
| luminous flux: | perfect color | 26 W | 1640 lm |
| | high flux | 26 W | 2240 lm |







**S 100 soft**
scattered light with soft contour beam angle (approx. 100°)

| | | | |
|---|---|---|---|
| inserts: | lens<br>satinised glass | | |
| luminous flux: | perfect color | 26 W | 1260 lm |
| | high flux | 26 W | 1720 lm |







**S 80 soft**
scattered light with soft contour beam angle (approx. 80°)

| | | | |
|---|---|---|---|
| inserts: | lens<br>soft edge glass | | |
| luminous flux: | perfect color | 26 W | 1420 lm |
| | high flux | 26 W | 1930 lm |








**S 60 soft**
scattered light with soft contour beam angle (approx. 60°)

| | | | |
|---|---|---|---|
| inserts: | lens<br>small lens low<br>soft edge glass | | |
| luminous flux: | perfect color | 26 W | 1610 lm |
| | high flux | 26 W | 2200 lm |

# Più piano edge pro
# Più lighting effects

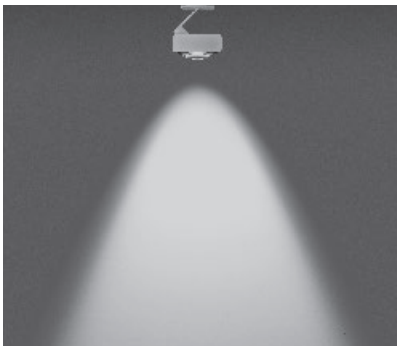





**S 40 soft**
scattered light with soft contour beam angle (approx. 40°)

| | | | |
|---|---|---|---|
| inserts: | lens<br>small lens medium<br>soft edge glass | | |
| luminous flux: | perfect color | 26 W | 1680 lm |
| | high flux | 26 W | 2300 lm |








**S 30 soft**
scattered light with soft contour beam angle (approx. 30°)

| | | | |
|---|---|---|---|
| inserts: | lens<br>small lens medium<br>fresnel lens | | |
| luminous flux: | perfect color | 26 W | 1650 lm |
| | high flux | 26 W | 2250 lm |

# Più piano edge pro
# Più R lighting effects

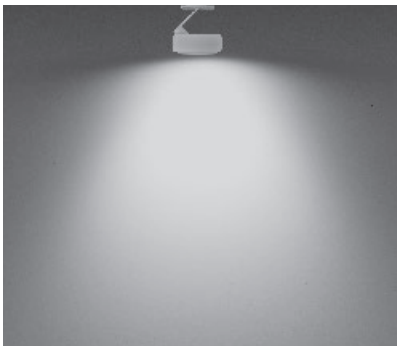





**B diffus**
diffused light

inserts: cone glass
small lens low
satinised glass

| luminous flux: | | | |
|---|---|---|---|
| | perfect color | 26 W | 1370 lm |
| | high flux | 26 W | 1870 lm |








**C 100 contour**
scattered light with contour beam angle (approx. 100°)

inserts: cone glass
small lens low

| luminous flux: | | | |
|---|---|---|---|
| | perfect color | 26 W | 1680 lm |
| | high flux | 26 W | 2290 lm |

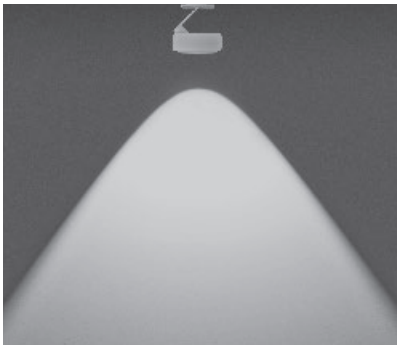





**C 80 contour**
scattered light with contour beam angle (approx. 80°)

inserts: cone glass
small lens medium

| luminous flux: | | | |
|---|---|---|---|
| | perfect color | 26 W | 1810 lm |
| | high flux | 26 W | 2460 lm |







**S 100 soft**
scattered light with soft contour beam angle (approx. 100°)

inserts: cone glass
small lens low
soft edge glass

| luminous flux: | | | |
|---|---|---|---|
| | perfect color | 26 W | 1520 lm |
| | high flux | 26 W | 2070 lm |

# Più piano edge pro
# Più R lighting effects







**S 80 soft**
scattered light with soft contour beam angle (approx. 80°)


| | | | |
|---|---|---|---|
| inserts: | cone glass<br>small lens medium<br>soft edge glass | | |
| luminous flux: | perfect color<br>high flux | 26 W<br>26 W | 1690 lm<br>2310 lm |







**S 60 soft**
scattered light with soft contour beam angle (approx. 60°)


| | | | |
|---|---|---|---|
| inserts: | cone glass<br>small lens high<br>soft edge glass | | |
| luminous flux: | perfect color<br>high flux | 26 W<br>26 W | 1610 lm<br>2200 lm |

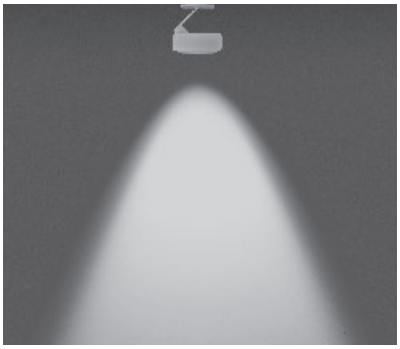





**S 40 soft**
scattered light with soft contour beam angle (approx. 40°)

| | | | |
|---|---|---|---|
| inserts: | cone glass<br>small lens medium<br>fresnel lens | | |
| luminous flux: | perfect color<br>high flux | 26 W<br>26 W | 1600 lm<br>2190 lm |

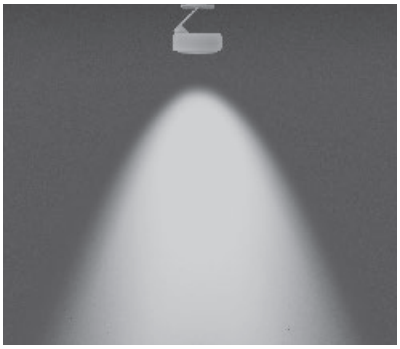




**S 30 soft**
scattered light with soft contour beam angle (approx. 30°)

| | | | |
|---|---|---|---|
| inserts: | cone glass<br>small lens high<br>fresnel lens | | |
| luminous flux: | perfect color<br>high flux | 26 W<br>26 W | 1560 lm<br>2130 lm |