Occhio


# Sento sospeso tre datasheet

LED system-suspended luminaire with double sided light output, luminous power 32 W per head. Ratio of up and down light adjustable. Lighting effect changeable via optional inserts.

tre-version with height adjustment
LED suspended luminaire freely height adjustable incl. power supply unit (converter) integrated in ceiling canopy, mounting on fixed ceiling, connection to 230 V. Remote dimmable via trailing edge phase-cut dimmer or with synchronous gestures »touchless fading« on the head.

tre-version with fixed length
LED suspended luminaire with a fixed adjustable height incl. power supply unit (converter) integrated in ceiling canopy, mounting on fixed ceiling,connection to 230 V. Remote dimmable via trailing edge phase-cut dimmer or with synchronous gestures »touchless fading« on the head.



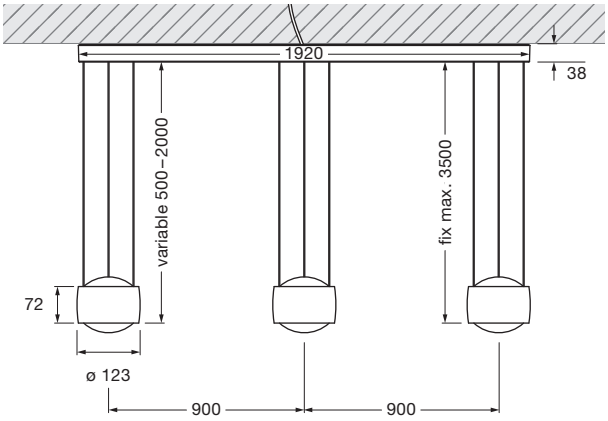


canopy width: 120

dimensions in mm

**technical data Sento sospeso tre**

| | | | |
|---|---|---|---|
| properties | material | aluminium, steel chrome-plated, painted or anodised, plastic, glass, optical plastic | |
| | height adjustment (variable) | 500 – 2000 mm (variable) | |
| | height setting (fix) | max. 3500 mm (can be adjusted during fitting) | |
| | weight | variable: 15.8 kg / fix: 16.3 kg | |
| surface | head | shiny chrome, dark chrome, matt chrome, glossy white, matt white, matt black, matt gold, rose gold, bronze, phantom, black phantom | |
| | canopy | matt white | |
| Occhio LED | average life time | > 50.000 hrs | |
| | energy efficiency class (luminous efficiency) | G (72 lm / W) | |
| | power | LED 3 × 32 W (incl. Occhio power supply unit approx. 3 × 38 W, standby < 0.5 W) / LED 3 × 26 W * (incl. Occhio power supply unit approx. 3 × 34 W, standby < 0.5 W) | |
| | color rendering index | perfect color; CRI Ra 97 | high flux; CRI Ra 85 |
| | color temperature (color consistency) | 2700, 3000 K (2-step) | 3000, 3500, 4000 K (2-step) |
| electricity | dimming | »touchless control« and Occhio air (optional) or via trailing-edge phasecut dimmer ** | |
| | power supply unit | integrated, for use with 230 V AC | |
| | power factor power supply (cos φ1) | 0.9 | |
| | flicker / stroboscopic effect | 1 (PstLM) / 0.9 (SVM) | |
| | permitted operating conditions | ambient temperature 10–30°C, for indoor use only | |

*** version shiny chrome, dark chrome, rose gold, bronze, phantom, black phantom ** For a list of compatible dimmers, see www.occhio.com/dim_en, trailing-edge phasecut dimmer and Occhio air not combinable**


IP 20

# Sento sospeso tre overview inserts

| | Sento D | Sento E |
|---|---|---|
| lens |  | |
| diffuser glass | |  |
| soft edge glass (optional) |  | |
| satinised glass (optional) |  | |
| double-sided head |  |  |
| satinised glass (optional) |  |  |
| soft edge glass (optional) |  |  |
| lens |  |  |
| |  |  |

# Sento sospeso tre lighting effects







**Sento D**
directed light in both directions beam angle approx. 80°

| | | | |
|---|---|---|---|
| inserts: | lens<br>lens | | |
| luminous flux: | perfect color | 3 × 32 W | 2070 lm |
| | high flux | 3 × 32 W | 2920 lm |
| | perfect color | 3 × 26 W | 1690 lm |
| | high flux | 3 × 26 W | 2300 lm |



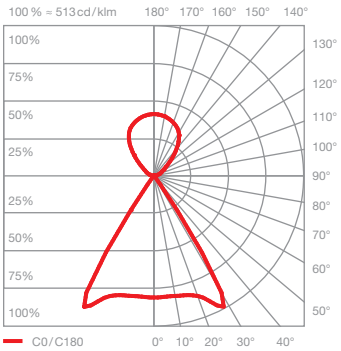


**Sento E**
diffuse up light directed down light beam angle approx. 80°

| | | | |
|---|---|---|---|
| inserts: | satinised glass<br>lens | | |
| luminous flux: | perfect color | 3 × 32 W | 1940 lm |
| | high flux | 3 × 32 W | 2730 lm |
| | perfect color | 3 × 26 W | 1580 lm |
| | high flux | 3 × 26 W | 2150 lm |