
Occhio

lei parete flat
datasheet

LED wall mounted luminaire with conical head. Version with a flat base for mounting on cavity or ceiling box, power supply with external power source (converter). Freely moveable through Occhio 3d-kinematics with two axes of rotation at an angle of 22.5° to each other, use via thermally insolated lampshade. Removable head for maintenance purposes, replaceable LED chip. Lighting effect can be changed via adjustable iris aperture, lampshade white matt, translucent. Power 9 W switchable and dimmable via sensor button on the back of the head. Power supply via AC adapter (converter), cable rolled up in the base (can be deactivated). The finishes of the aperture, cover, arm and base are freely configurable.



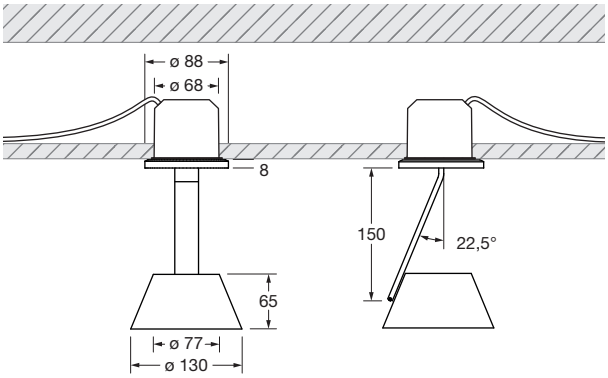

dimensions in mm

technical data lei parete flat

properties	material	aluminium, steel chrome-plated, painted or anodised, plastic, glass, stainless steel, optical plastic
	turning range body	360° (with stop)
	turning range head	360°
	weight	0.6 kg
surface	shade	matt white (translucent)
	aperture, cover	matt gold, rose gold, bronze, shiny chrome, dark chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom
	body	shiny chrome, dark chrome, matt chrome, matt white, matt black
	base	shiny chrome, dark chrome, matt chrome, glossy white, matt white, matt black
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class (luminous efficiency)	G (65 lm / W)
	power	LED 9 W (incl. Occhio power supply unit approx. 11 W, standby < 0.5 W)
	color rendering index	perfect color; CRI Ra 97
	color temperature (color consistency)	2700, 3000 K (2-step)
electricity	dimming	via sensor button on the back of the head or external with trailing edge phase-cut dimmer (on demand: push button, 1–10 V, DALI)
	power supply unit	remote, driven by constant current source 48 V DC / min. 11 W
	power factor power supply (cos φ1)	0.9
	flicker / stroboscopic effect	1 (PstLM) / 0.9 (SVM)
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only


*** For a list of compatible dimmers, see www.occhio.com/dim_en**

IP 20

Occhio

lei parete flat
lighting effects



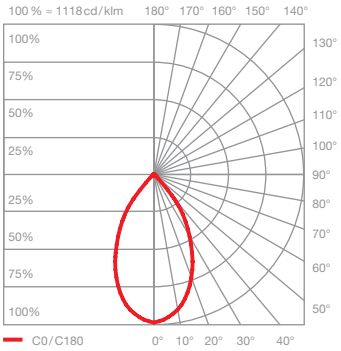

lei
directed light
beam angle approx. 60°

insert:	iris		
luminous flux:	perfect color	9 W	610 lm
	high flux	9 W	840 lm