

Occhio

Coro spider 6
datasheet

LED suspended luminaire spider cloud with 6 rod-shaped heads with zoom optic and round canopy. spider cloud version for surface mounting. Coro spider configurations planned for perfect positioning above a dinner table. Table height 0.75 m, room height 2.40 m–2.80 m, table length 1.8 m–2.0 m. Ensemble can be personalized by individual positions for cable redirections and set of cables.

Version with integrated power supply unit, connection to 230 V AC mains voltage. Switching, dimming and »color tune« via Occhio air or »touchless control« (gesture control on head). All heads are synchronized (no individual head control). The color temperature can be adjusted continously between 2700–4000 K (optional 2200–3500 K). The zoom optic is glare-free and the beam angle continously adjustable between 40–80°.

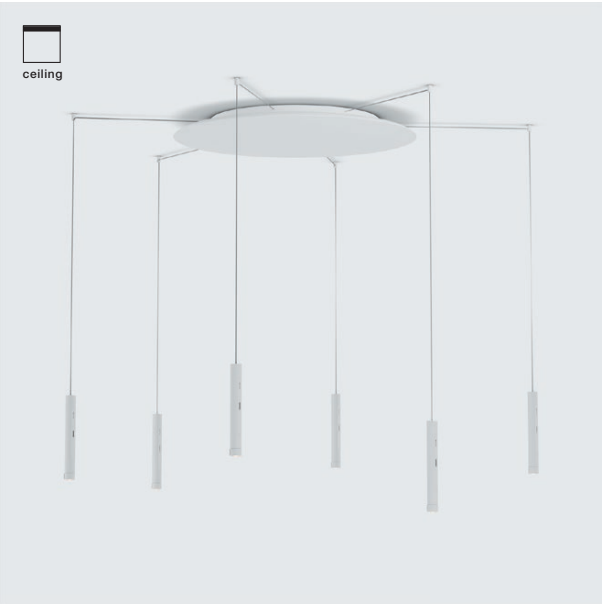

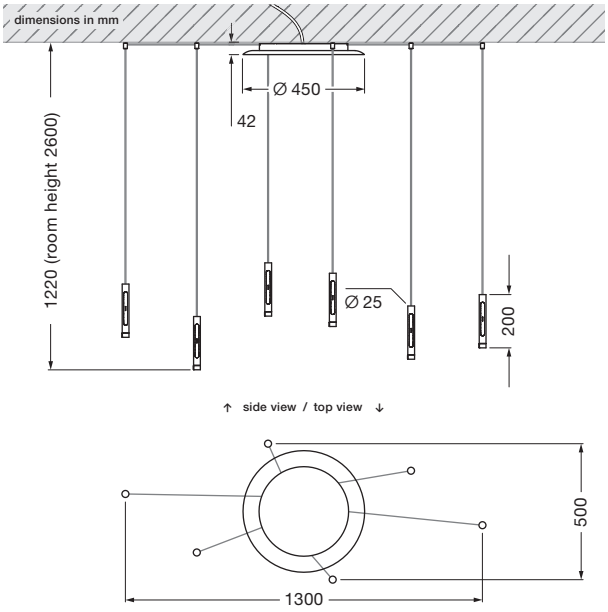

technical data Coro spider 6


properties	material	aluminium, glass, PVD coated, painted, plastic
	cable length / arrangement	1220 mm (room height 2,6 m) / arrangement height adjustable by ↕ 200 mm
	weight	5.2 kg
surface	head / zoom	gold, matt gold, rose gold polished, matt silver, matt white, matt black, phantom polished, black phantom polished, dark chrome polished
	pads / cover	matt white, matt black
	cable	white, black
	canopy	matt white, matt black
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2200–3500K) or E (2700–4000K)
	power	LED 6 × 6 W (incl. Occhio power supply unit approx. 49 W, standby < 0.5 W)
	color rendering index	CRI Ra 92
	color temperature (color consistency)	color tune: 2200–3500 K (2-step) 2700–4000 K (2-step)
electricity	dimming	via »touchless control« and Occhio air
	connection	230 V AC
	permitted operating conditions	ambient temperature 10 – 30°C, for indoor use only

IP 20

Occhio

Coro spider 6
lighting effects






Z40
directed light (approx. 40°)

optics:	zoom lens	
power:	high color	6 × 6 W
luminous flux:	2200–3500 K	6 × 130–170 lm
	2700–4000 K	6 × 150–180 lm



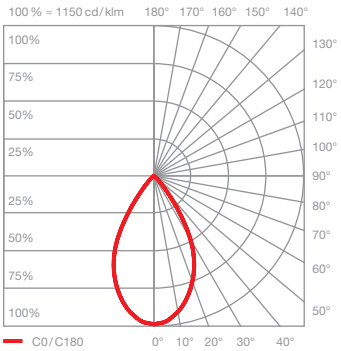

Z80
directed light (approx. 80°)

optics:	zoom lens	
power:	high color	6 × 6 W
luminous flux:	2200–3500 K	6 × 200–260 lm
	2700–4000 K	6 × 230–280 lm